
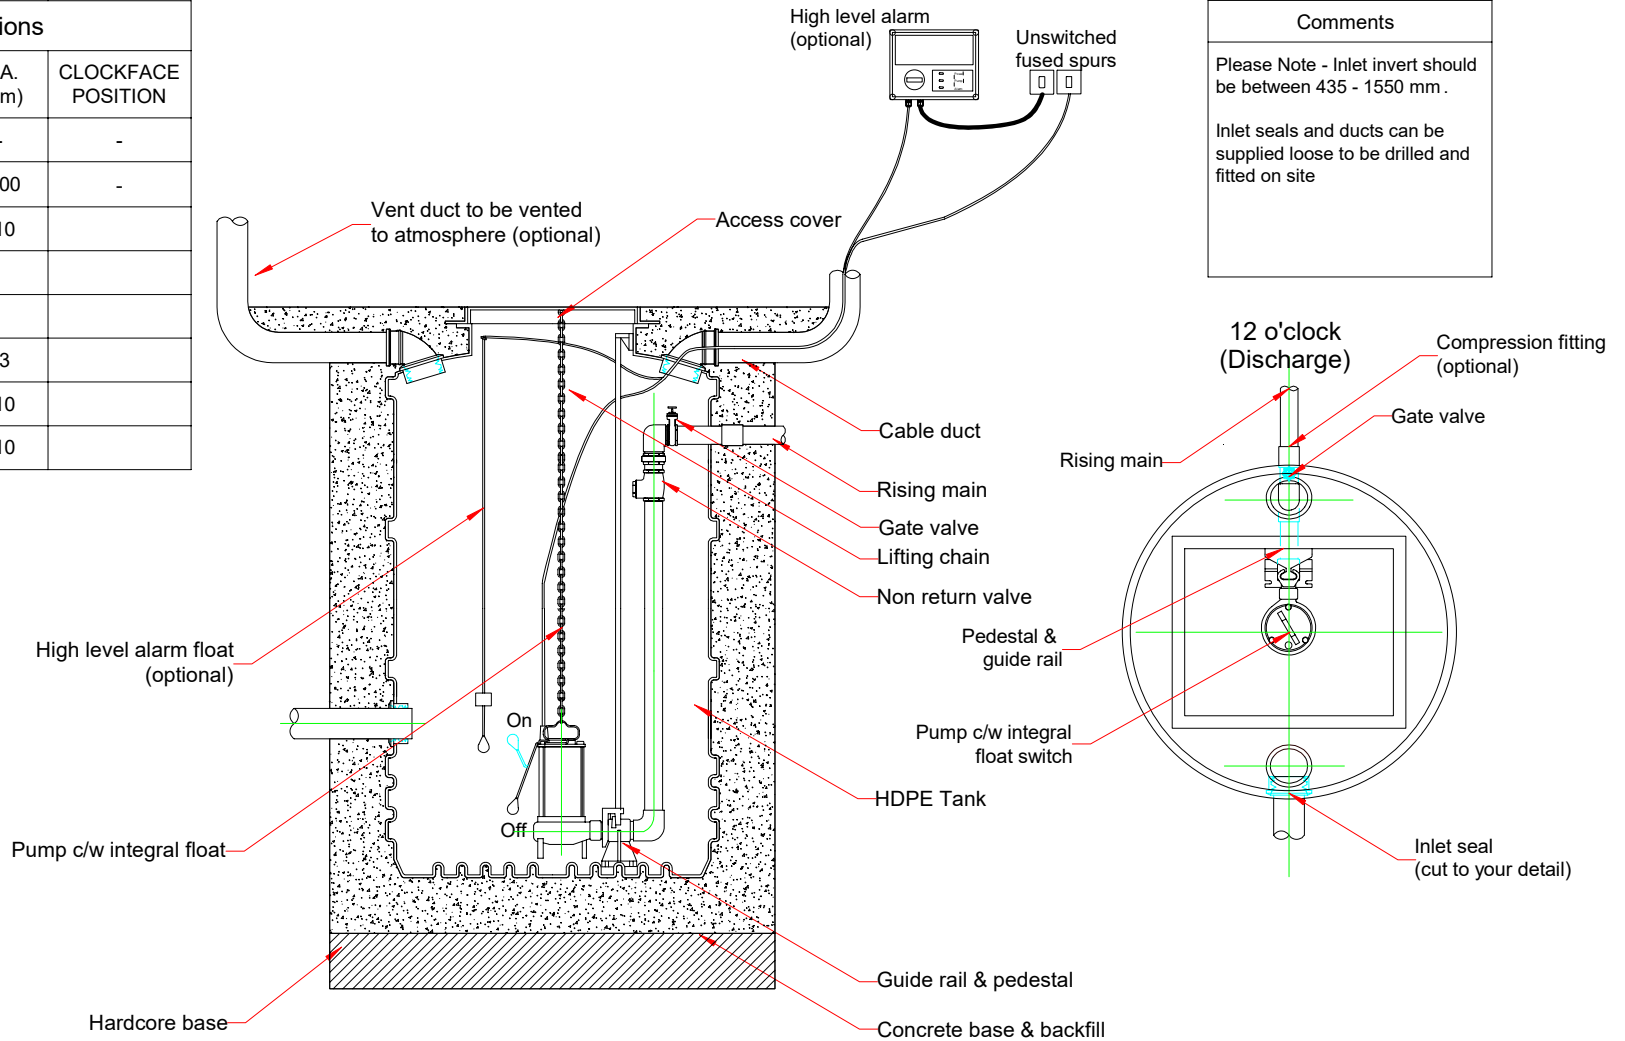


Fabrication Specifications				
ITEM	INDEX	DEPTH (mm)	DIA. (mm)	CLOCKFACE POSITION
Tank depth	A	2000	-	-
Tank Ø	B	-	1200	-
Inlet	C1		110	
Inlet	C2			
Inlet	C3			
Discharge	D		63	
Cable duct			110	
Vent			110	

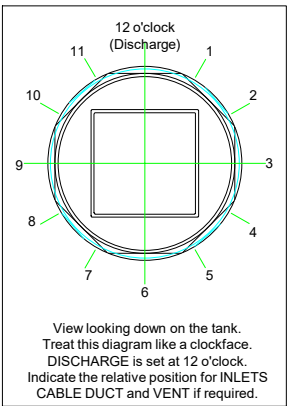

Comments

Please Note - Inlet invert should be between 435 - 1550 mm.

Inlet seals and ducts can be supplied loose to be drilled and fitted on site

PLEASE NOTE THAT THIS DOCUMENT MUST BE READ IN CONJUNCTION WITH THE INSTALLATION & OPERATING GUIDELINES

REV	DETAIL	DATE	DRAWN

TITLE

Single rigged
Ø1200 x 2000 mm
typical layout

DRAWING NO	DATE	DRAWN
DPT112078	05/12/2018	gf
THIRD ANGLE PROJECTION		SCALE
		NOT TO SCALE

CUSTOMER

SHEET	
1 of 1	
REV	0
TOLERANCE +/- 2%	