

# SS300 110



**SuDS**TAINABILITY<sup>®</sup>  
DRAINAGE PRODUCTS THAT ARE DESIGNED FOR LONGEVITY






# SS300 110

For the catchment and removal of silt and debris from roofs and hard standing areas, before entering the surface water drainage system. The Silt Sentinel 300110 model is ideal for installation upstream of smaller volume, cellular/crate - attenuation systems, significantly improving the water quality going into the system, and thus supporting the longevity and sustainability of the system.


This model is designed for use in drainage systems within the curtilage of a property and not for use in the road or highway. All units are supplied with circular, 35KN loading access cover, which will take a light traffic loading, such as domestic driveways and gardens, but not in areas that will potentially experience traffic that is over 2.5 tonnes.

For trafficked, heavy duty and installations deeper than 1100mm. Please refer to our Model : 300110HD


As detailed opposite, there are four units available, each offering a different invert depth. All models have same base unit, which features an integral filter basket, which has an alloy filter cassette fitted inside, this filter cassette gives increased separation of silt and removal of any debris that enters the unit from the upstream drainage system. As all the flow has to pass through the filter to discharge from the unit the solids and debris are retained in the basket. The filter basket also features a stainless steel handle, which is ergonomically designed to aid lifting.

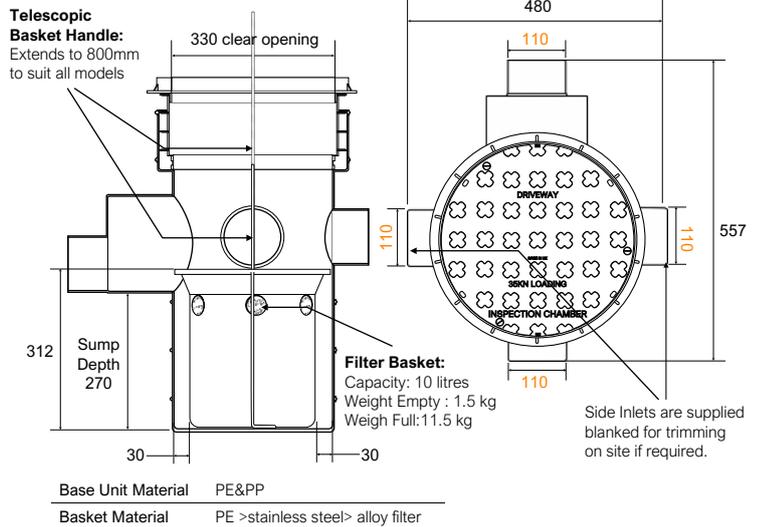


MODEL:SS300110

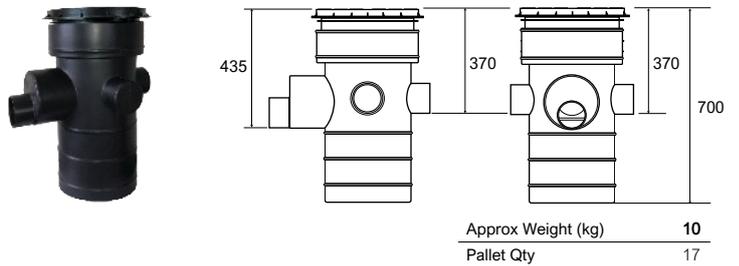


MODEL:SS300110ER1

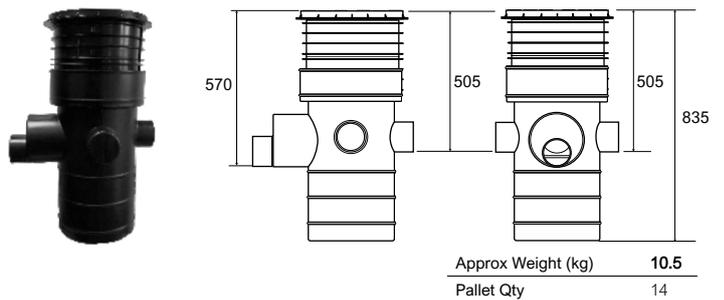

MODEL:SS300110ER2

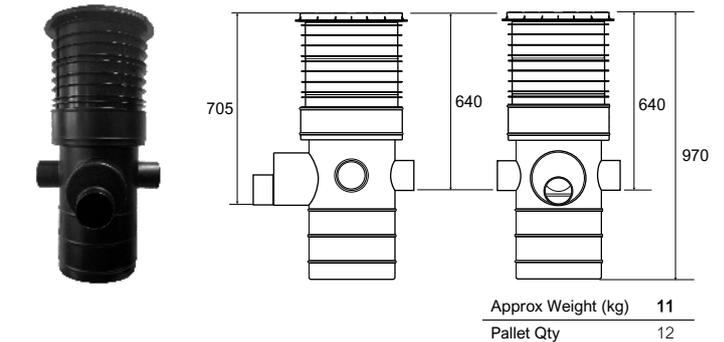

MODEL:SS300110ER3

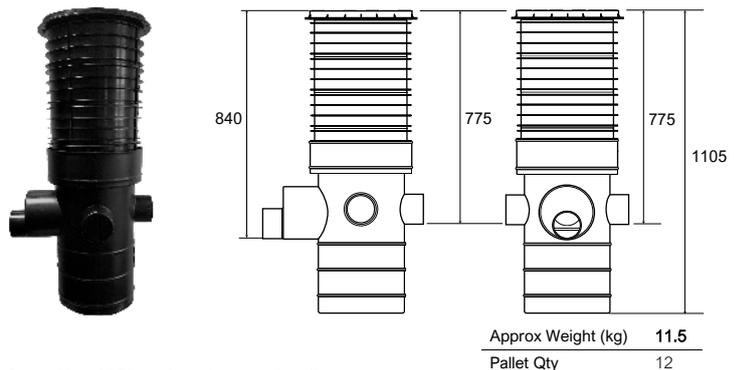

Please Note: All Dimensions shown are in millimetres