

SS300 **110** HD



SuDSTAINABILITY[®]

DRAINAGE PRODUCTS THAT ARE DESIGNED FOR LONGEVITY

PDS/SS300110HD/6/20/V3





SS300110HD



Designed for the catchment and removal of silt and debris from roofs, car parks, and roadways, before entering the surface water drainage system. The Silt Sentinel 300 models are ideal for installation upstream of smaller volume, cellular/crate - attenuation systems. Installation of a Silt Sentinel will significantly improve the water quality downstream, supporting the sustainability of the drainage system.

The SS300110HD is our Heavy Duty model and is designed specifically for installation in roads and heavily trafficked areas, car parks and hard standing, that have vehicle loadings over 2.5 tonnes. However it can be used for deeper non trafficked installation if required.

It comes pre fitted with a 1500mm length of twinwall access shaft, offering an overall depth of 2000mm, which complies with SfA7 guidelines for 300mm \varnothing inspection chambers.

All Silt Sentinel 300 models have same base unit, which features an integral filter basket, which has an alloy filter cassette fitted inside, this filter cassette gives increased separation of silt and removal of any debris that enters the unit from the upstream drainage system. As all the flow has to pass through the filter to discharge from the unit the solids and debris are retained in the basket. The filter basket also features a stainless steel handle, which is ergonomically designed to aid lifting.

*The model is not supplied with an access cover.

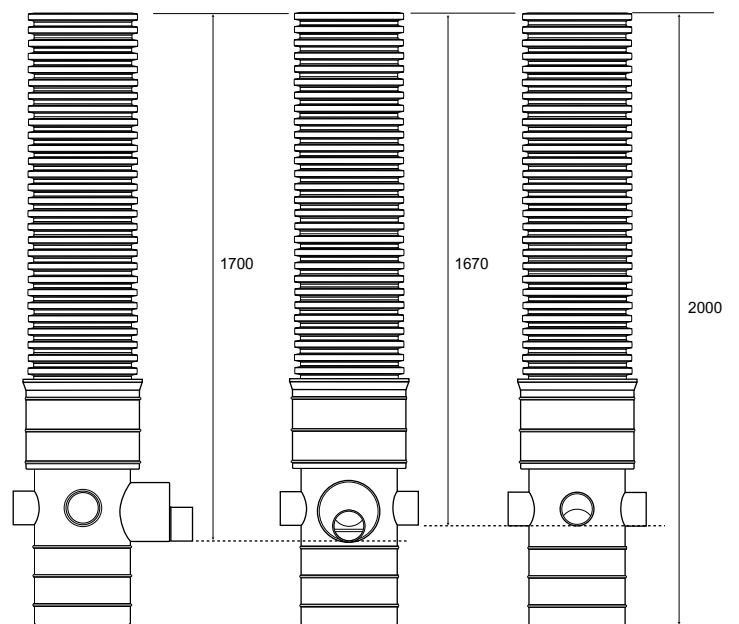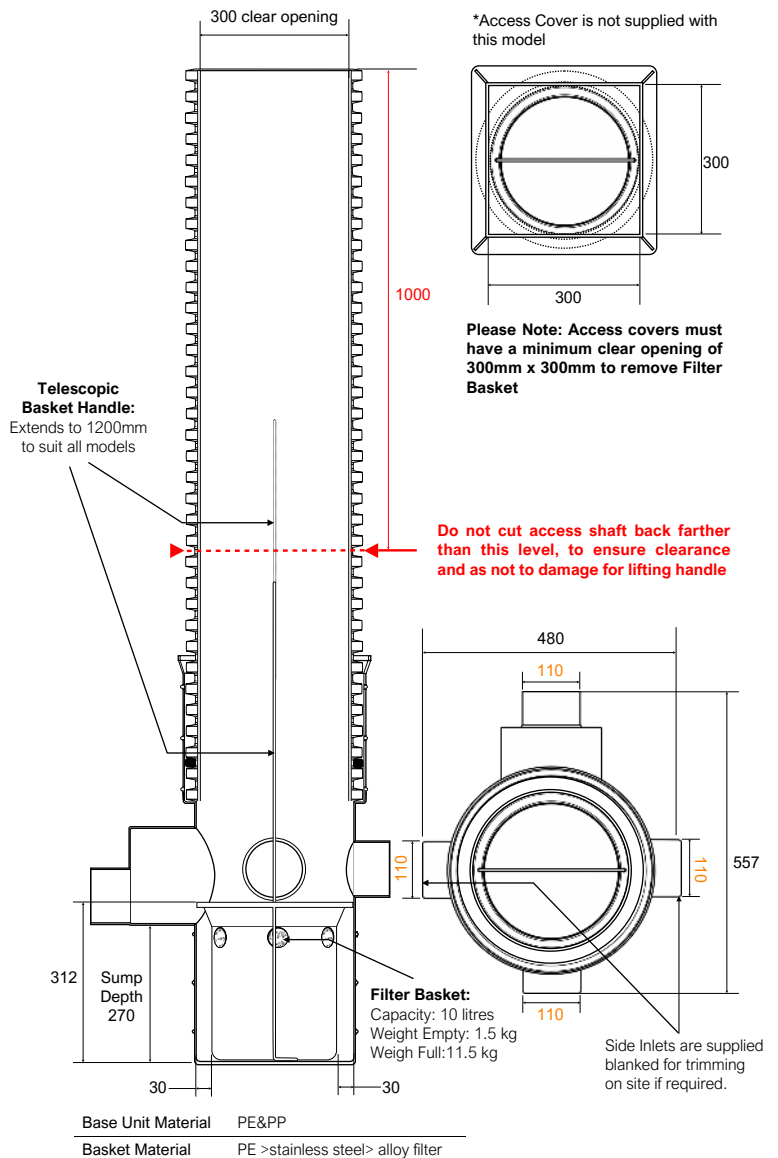

Approx Weight (kg)	17
Pallet Qty	6